


Datasheet Wire Link Belts - Groups 100/200



Group 100

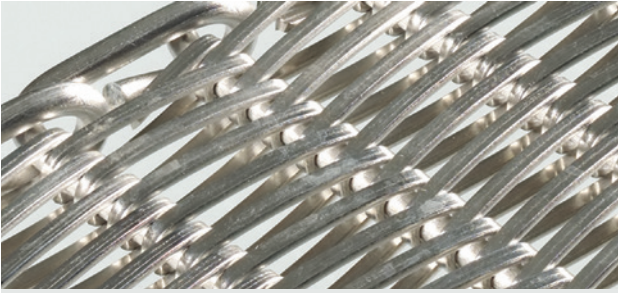

Group 200

features	spiral wires (flat = group 100 / round = group 200), densely braided in opposite senses with smooth or crimped crossrods		
materials	mild steel (plain or galvanized) spring steel stainless grades: 1.4016 (AISI 430) 1.4301 (AISI 304) 1.4401 (AISI 316) 1.4541 (AISI 321) 1.4571 (AISI 316 Ti) 1.4841 (AISI 314) 1.4864 ...other steel grades on request	type of belt edges	K = welded edge S = looped edge (standard) Sp = welded looped edge Sa = pressed looped edge B = bent edge Ri = trough edge
temperatures [°C]	-100 bis 1200	max. width [mm]	5.000

dimensions group 100 [mm]		dimensions group 200 [mm]	
flat spiral wire	1,0 x 0,7 - 6 x 3	round spiral wire	0,7 - 5
crossbar Ø	1,2 - 8	crossbar Ø	1,2 - 8
pitch	6 - 63	pitch	6 - 63

Examples for standard dimensions*

type	Ø spiral	Ø crossbar	pitch
F210	1,0	1,8	10,0
F216	1,2	2,2	16,0
F220	1,2	2,5	20,0
F233	3,1	5,0	33,0
F235	2,5	5,0	35,0
F250,8	5,0	8,0	50,8

* our complete range of supply on www.beltconfiguration.com

