




Your Tailor-Made Wire Belt

Braided Rod Belts ("Enrobing Belts") - Group 700



features	crossrods made of crimped round wires; bent and hooked between each other; with or without sprocket edge as rim reinforcement and guide for sprocket wheels made endless with small connecting tubes		
materials	☐ plain steel ☐ spring steel ☐ 1.4310 (AISI 301)	edge design	☐ S-edge (4,2 - 8,2mm) ☐ B-edge for sprocket wheels (6,1 - 13,2mm) ☐ Z-edge for sprocket wheels (reinforcement)
temperatures [°C]	-100 to 400	max. width [mm]	8.000
wire Ø [mm]	0,9 - 4,0	pitch [mm]	4,0 - 19,05

For our complete range of supply please visit www.beltconfiguration.com

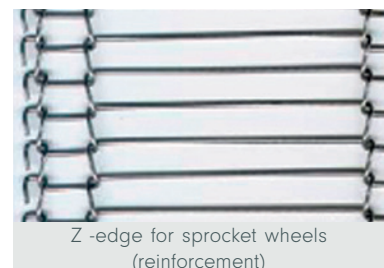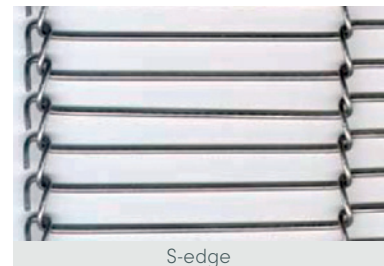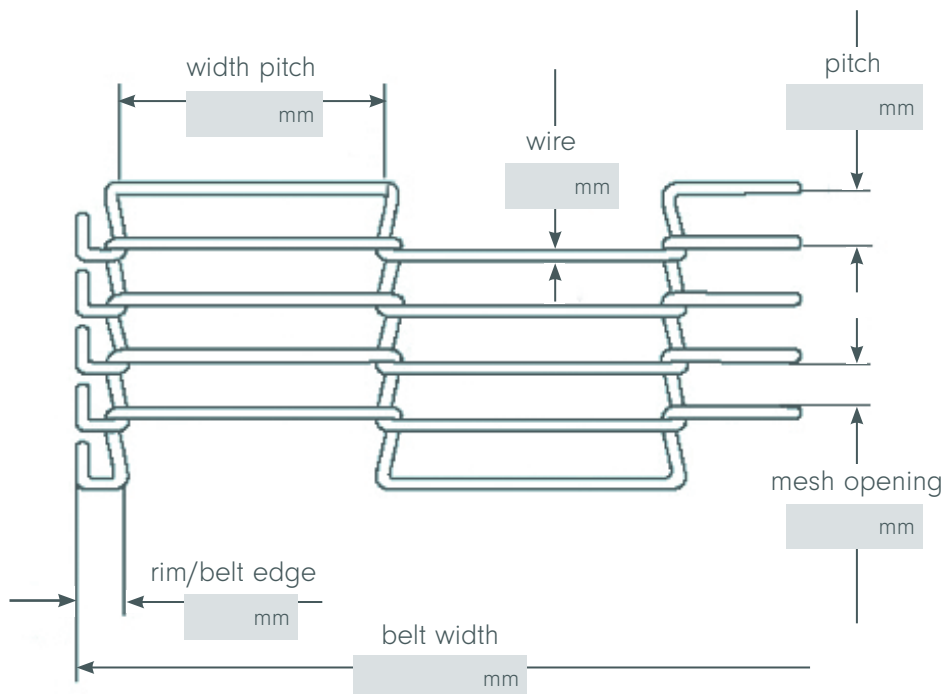

Your Tailor-Made Wire Belt

Should you still have questions we will help you with pleasure +49 (0)208 / 58 01 - 01

Business Card

Your contact details:

Email*	
First name*	
Last name*	
Company	
Project title	
Street*	
Zip / town*	
Country*	
Phone*	

With * marked fiels are mandatory.

Comments:

Send us this form

- per fax +49 208 / 58 01 - 501
- per mail gurt@steinhaus-gmbh.de
- per post STEINHAUS GmbH
Platanenallee 46
45478 Mülheim an der Ruhr
GERMANY



STEINHAUS

Platanenallee 46
45478 Mülheim a.d. Ruhr
Germany

Phone +49 208 / 58 01 - 01
sales@steinhaus-gmbh.de
www.steinhaus-gmbh.de