



Your Tailor-Made Wire Belt

Braided Link Belts - Groups 300/400

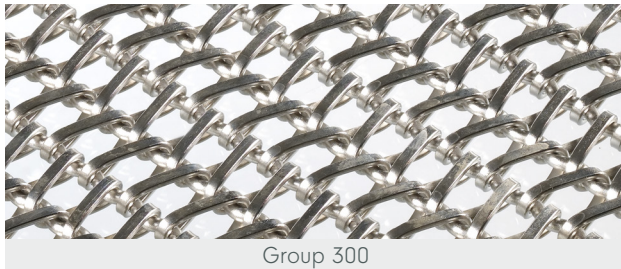

Group 300

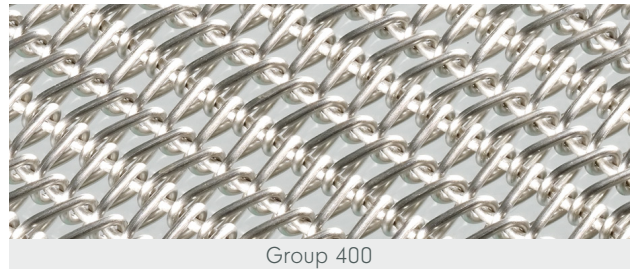

Group 400


features	spiral wires (flat = group 300 / round = group 400), densely braided in opposite senses with smooth or crimped crossrods		
materials	☐ mild steel (plain or galvanized) ☐ spring steel stainless grades: ☐ 1.4016 (AISI 430) ☐ 1.4301 (AISI 304) ☐ 1.4401 (AISI 316) ☐ 1.4541 (AISI 321) ☐ 1.4571 (AISI 316 Ti) ☐ 1.4841 (AISI 314) ☐ 1.4864other steel grades on request	type of belt edges	☐ K = welded edge ☐ S = looped edge (standard) ☐ Sp = welded looped edge ☐ Sa = pressed looped edge ☐ B = bent edge ☐ Ri = trough edge
temperatures [°C]	-100 bis 1200	max. width [mm]	5000

dimensions group 300 [mm]		dimensions group 400 [mm]	
flat spiral wire	1,0 x 0,7 - 6 x 3	spiral wire	0,7 - 5
crossbar Ø	1,2 - 8	crossbar Ø	1,2 - 8
inclination	2 - 50	inclination	2 - 50
pitch	2,7 - 80	pitch	2,7 - 80

Examples for standard dimensions*

type	Ø spiral	Ø crossbar	inclination	pitch
☐ F404,2	1,0	1,8	4,2	10,0
☐ F405,2	1,2	2,2	5,2	16,0
☐ F406,5	1,2	2,5	6,5	20,0
☐ F408,5	3,1	5,0	8,5	33,0
☐ F415	2,5	5,0	15,0	35,0
☐ F425	5,0	8,0	25,0	50,8

* our complete range of supply on www.beltconfiguration.com

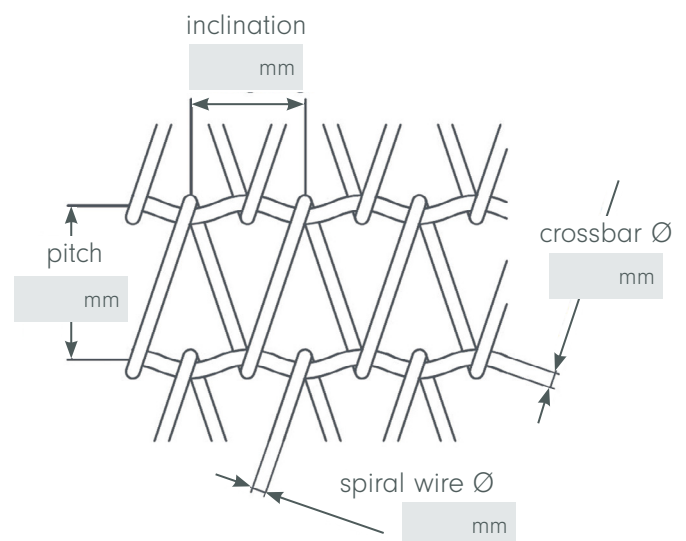

STEINHAUS

Your Tailor-Made Wire Belt

Should you still have questions we will help you with pleasure +49 (0)208 / 58 01 - 01

Business Card

Your contact details:

Email*	
First name*	
Last name*	
Company	
Project title	
Street*	
Zip / town*	
Country*	
Phone*	

With * marked fiels are mandatory.

Comments:

Send us this form

- per fax +49 208 / 58 01 - 501
- per mail export@steinhaus-gmbh.de
- per post STEINHAUS GmbH
Platanenallee 46
45478 Mülheim an der Ruhr
GERMANY