


# Your Tailor-Made Wire Belt

## Braided Link Belts - Groups 300/400



Group 300

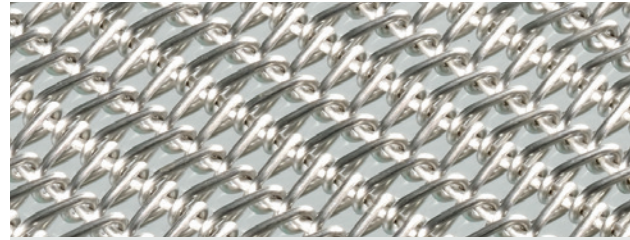

Group 400

features	spiral wires (flat = group 300 / round = group 400), densely braided in opposite senses with smooth or crimped crossrods		
materials	<input type="checkbox"/> mild steel (plain or galvanized) <input type="checkbox"/> spring steel stainless grades: <input type="checkbox"/> 1.4016 (AISI 430) <input type="checkbox"/> 1.4301 (AISI 304) <input type="checkbox"/> 1.4401 (AISI 316) <input type="checkbox"/> 1.4541 (AISI 321) <input type="checkbox"/> 1.4571 (AISI 316 Ti) <input type="checkbox"/> 1.4841 (AISI 314) <input type="checkbox"/> 1.4864 ....other steel grades on request	type of belt edges	<input type="checkbox"/> K = welded edge <input type="checkbox"/> S = looped edge (standard) <input type="checkbox"/> Sp = welded looped edge <input type="checkbox"/> Sa = pressed looped edge <input type="checkbox"/> B = bent edge <input type="checkbox"/> Ri = trough edge
temperatures [°C]	-100 bis 800	max. width [mm]	8.000


dimensions group 300 [mm]		dimensions group 400 [mm]	
flat spiral wire	1,0 x 0,7 - 6 x 3	flat spiral wire	0,7 - 5
crossbar Ø	1,2 - 8	crossbar Ø	1,2 - 8
inclination	2 - 50	inclination	2 - 50
pitch	2,7 - 80	pitch	2,7 - 80

### Examples for standard dimensions\*

type	Ø spiral	Ø crossbar	inclination	pitch
<input type="checkbox"/> F404,2	1,0	1,8	4,2	10,0
<input type="checkbox"/> F405,2	1,2	2,2	5,2	16,0
<input type="checkbox"/> F406,5	1,2	2,5	6,5	20,0
<input type="checkbox"/> F408,5	3,1	5,0	8,5	33,0
<input type="checkbox"/> F415	2,5	5,0	15,0	35,0
<input type="checkbox"/> F425	5,0	8,0	25,0	50,8

\* our complete range of supply on [www.beltconfiguration.com](http://www.beltconfiguration.com)

spiral wire pitch/inclination

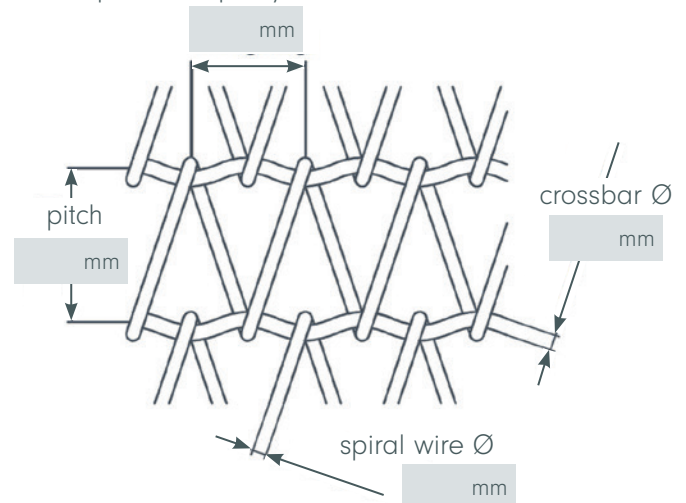

# Your Tailor-Made Wire Belt

Should you still have questions we will help you with pleasure +49 (0)208 / 58 01 - 01

Business Card

Your contact details:

Email*	
First name*	
Last name*	
Company	
Projet title	
Street*	
Zip / town*	
Country*	
Phone*	

With \* marked fiels are mandatory.

Comments:

Comments area with multiple horizontal lines for text entry.

Send us this form

- per fax +49 208 / 58 01 - 501
- per mail gurt@steinhaus-gmbh.de
- per post STEINHAUS GmbH  
Platanenallee 46  
45478 Mülheim an der Ruhr  
GERMANY